



Level



Pressure



Flow



Temperature



Liquid
Analysis



Registration



Systems
Components



Services



Solutions

Safety Instructions

Prosonic M

FMU40, FMU41, FMU42, FMU44

PROFIBUS PA, FOUNDATION Fieldbus

Ex ia IIC T1...T6 Ga/Gb

Ex ia IIC T1...T6 Gb

NEPSI GYJ12.1530X



en - Document: XA00437F-B

Safety instructions for electrical apparatus for explosion-hazardous areas

→ 3

zh - 文档: XA00437F-B

爆炸环境中电气仪表的安全指南

→ 7

Prosonic M

FMU40, FMU41, FMU42, FMU44

PROFIBUS PA, FOUNDATION Fieldbus

**Associated
Documentation**

This document is an integral part of the following Operating Instructions:
PROFIBUS PA: BA00238F/00
FOUNDATION Fieldbus: BA00239F/00
The Operating Instructions which are supplied and correspond to the device type apply.

Designation

Designation of explosion protection	Ex ia IIC T1...T6 Ga/Gb
	Ex ia IIC T1...T6 Gb


Applied standards

GB 3836.1-2010
GB 3836.4-2010
GB 3836.20-2010

Safety instructions:
Special conditions

Permitted ambient temperature range at the electronics housing: $-40\text{ °C} \leq T_a \leq +80\text{ °C}$.
 Observe the information in the temperature tables.

Safety instructions:
Installation

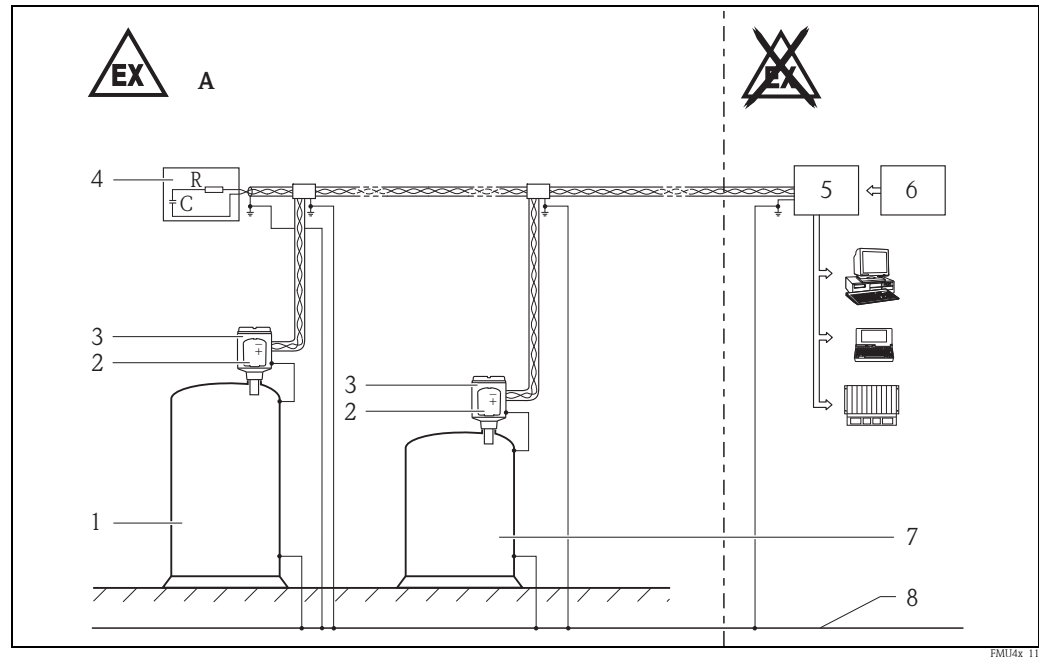


1

A Zone 1

- 1 Tank, hazardous area Zone 0
- 2 Electronic insert
- 3 Housing, optionally with or without VU331 display and operating module:
– FI2, aluminium coated
- 4 Permitted terminating resistor Ex ia IIC
- 5 Certified associated apparatus (FISCO model)
- 6 Supply voltage
- 7 Tank, hazardous area Zone 1
- 8 Potential equalization

- Install the device according to the manufacturer's instructions and any other valid standards and regulations.
- Do not operate the device outside the specified electrical and thermal parameters.
- The intrinsically safe input power circuit of the device is isolated from ground potential and has a dielectric strength of at least 500 V_{rms} with respect to it.
- The relationship between the permitted ambient temperature for the electronics housing, dependent on the range of application and temperature classes is shown in the table (→ 6).
- Continuous duty temperature of the cable $\geq T_a + 5\text{ K}$.
- Avoid a build-up of electrostatic charge on the sensor surface. Do not make friction and clean with dry cloth.
- The user shall not change the configuration in order to ensure the explosion protection performance of the equipment. Any change may impair safety.
- For installation, use and maintenance of the device, users must also observe the requirements stated in the Operating Instructions and the standards:
 - GB50257-1996: "Code for construction and acceptance of electric device for explosion atmospheres and fire hazard electrical equipment installation engineering".
 - GB3836.13-1997: "Electrical apparatus for explosive gas atmospheres, Part 13: Repair and overhaul for apparatus used in explosive gas atmospheres".
 - GB3836.15-2000: "Electrical apparatus for explosive gas atmospheres, Part 15: Electrical installations in hazardous area (other than mines)".
 - GB3836.16-2006: "Electrical apparatus for for explosive gas atmospheres, Part 16: Inspection and maintenance of electrical installation (other than mines)".
- For grounding the screen, → 2.

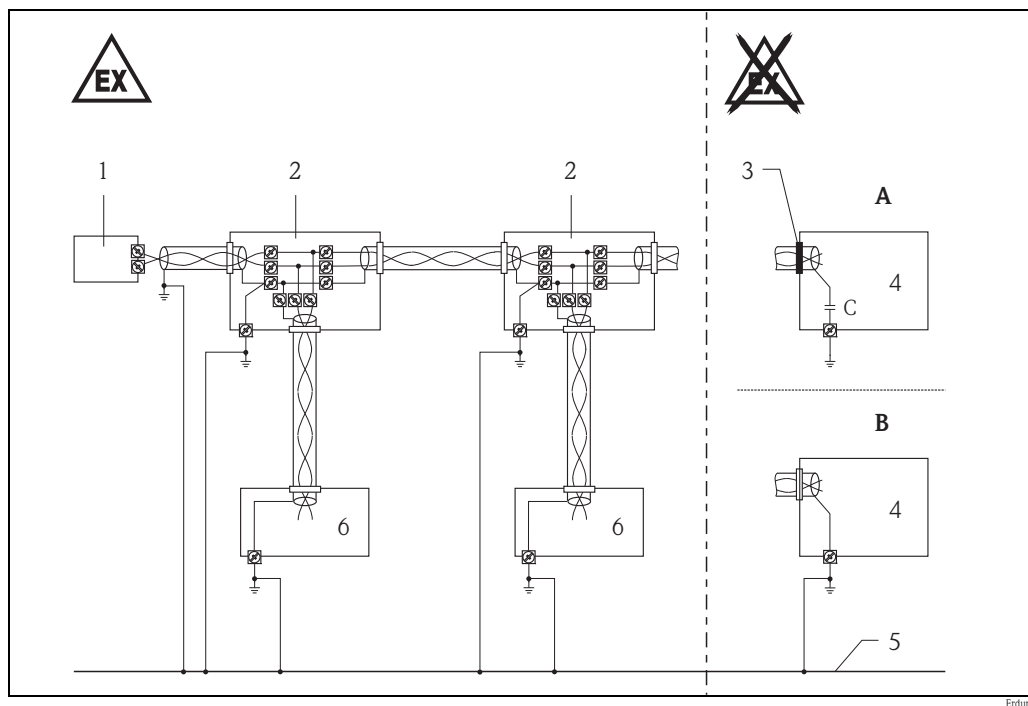

2

A Version 1

Use small capacitors (e.g. 1 nF, 1500 V, dielectric strength, ceramic).
Total capacitance connected to the screen may not exceed 10 nF.

B Version 2

1 Terminating resistor

2 Distributor/T box

3 Screen insulated

4 Supply unit/Segment coupler

5 Potential equalization (secured in high degree)

6 Field device

Note

- The type of protection changes as follows when the devices are connected to certified intrinsically safe circuits of Category Ex ib for Equipment Groups IIC or IIB: Ex ib IIC T6 or Ex ib IIB T6.
- For entity concept, the criteria for interconnection between the I/O circuits and the associated apparatus is as follows: $U_o \leq U_i$, $I_o \leq I_i$, $P_o \leq P_i$, $C_o \geq C_i + C_c$, $L_o \geq L_i + L_c$.
Note: C_c and L_c represent the distributed capacitance and distributed inductance of cable.

Option

- Remote display
E.g. FHX40. Observe associated Safety Instructions.

Safety instructions:
Zone 0

- Only operate devices in potentially explosive vapour/air mixtures under atmospheric conditions:
 $-20\text{ °C} \leq T \leq +60\text{ °C}$
 $800\text{ hPa} \leq p \leq 1100\text{ hPa}$
- If no potentially explosive mixtures are present, the transmitters may be operated under other atmospheric conditions in accordance with the manufacturer's specifications.
- Only install the devices in media for which the wetted materials have sufficient durability.
- Associated apparatus with galvanic isolation between the intrinsically safe and non-intrinsically safe circuits are preferred.

Temperature tables

Process temperature
max. 80 °C

Temperature class	Ambient temperature
T6	−40 °C...+60 °C
T5	−40 °C...+75 °C
T4...T1	−40 °C...+80 °C

Connection data

Prosonic M with electronic insert PROFIBUS PA or FOUNDATION Fieldbus Ex ia IIC:
as per FISCO model or ENTITY concept (individual interconnection)

- Power supply and signal circuit in protection type: intrinsic safety Ex ia IIC or IIB

Maximum values		
$U_i = 17.5 \text{ V}$ $I_i = 500 \text{ mA}$ $P_i = 5.5 \text{ W}$	or $U_i = 24 \text{ V}$ $I_i = 250 \text{ mA}$ $P_i = 1.2 \text{ W}$	$L_i = 10 \text{ } \mu\text{H}$ $C_i = 5 \text{ nF}$ Leak current $\leq 50 \text{ } \mu\text{A}$

Option: Remote display

- Power supply and signal circuit in protection type: intrinsic safety Ex ia IIC or IIB.

Power supply		
$U_o = 4.2 \text{ V}$ $I_o = 34 \text{ mA}$ $P_o = 36 \text{ mW}$	$L_o = 5 \text{ mH}$ $C_o = 4 \text{ } \mu\text{F}$	effective inner inductance $L_i = \text{negligible}$ effective inner capacitance $C_i = \text{negligible}$ characteristic curve: linear

Prosonic M

FMU40, FMU41, FMU42, FMU44



PROFIBUS PA, FOUNDATION Fieldbus (基金会现场总线)

相关资料

本文档是下列操作手册的组成部分：
PROFIBUS PA：BA00238F/00
FOUNDATION Fieldbus (基金会现场总线)：BA00239F/00
根据用户订购仪表的具体型号所提供的相应操作手册。

名称

防爆代号	Ex ia IIC T1...T6 Ga/Gb
	Ex ia IIC T1...T6 Gb


适用标准

GB 3836.1-2010
GB 3836.4-2010
GB 3836.20-2010

安全指南：
特殊条件

电子部件外壳处的允许环境温度范围： $-40\text{ }^{\circ}\text{C} \leq T_a \leq +80\text{ }^{\circ}\text{C}$ 。
遵守温度表中的信息。

安全指南：
安装

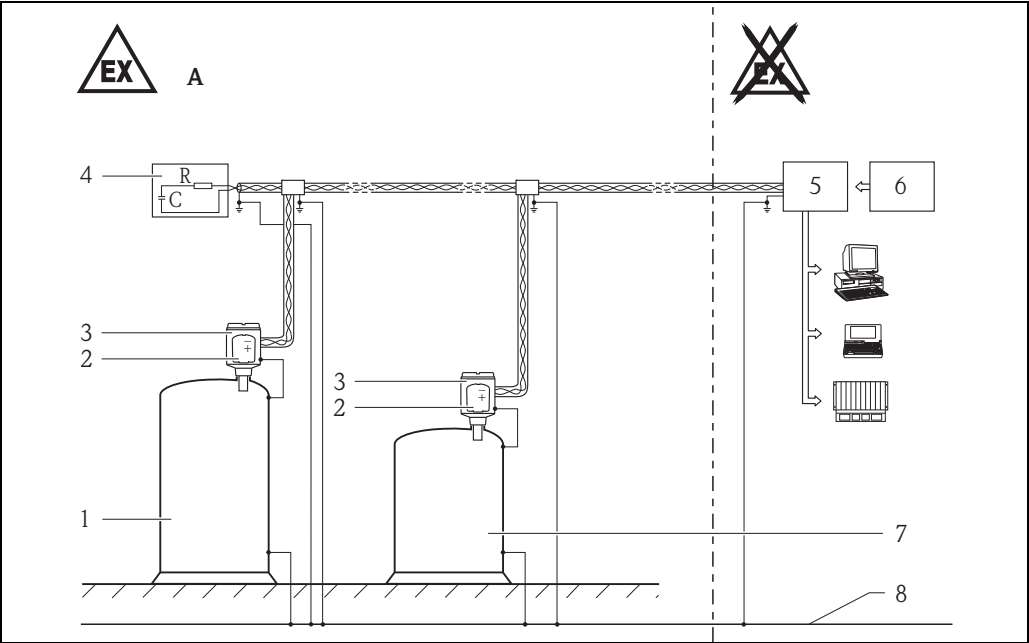

1

A 区域 1

- 1 液罐，危险区，区域 0
- 2 电子插件
- 3 外壳，可选带有或不带有 VU331 显示屏和操作模块：
- FI2，铝涂层
- 4 允许的终端电阻 Ex ia IIC
- 5 经认证的关联设备 (FISCO 模型)
- 6 供电电压
- 7 液罐，危险区，区域 1
- 8 电势平衡

- 按照制造商的说明及其它有效标准和规定来安装设备。
- 使用设备时请勿超出指定的电、热参数。
- 设备的本安型输入电源电路与地电势是绝缘的，相对地电势至少有 $500\text{ V}_{\text{rms}}$ 绝缘强度。
- 电子部件外壳的允许环境温度 (取决于应用范围) 与温度等级之间的关系如表中所示 (→ 10)。
- 电缆持续工作温度 $\geq T_a + 5\text{ K}$ 。
- 避免传感器表面上积累静电荷。不要用干布摩擦和清洁。
- 用户不得更改配置，以确保设备的防爆性能。任何更改都可能影响安全。
- 在安装、使用和维护设备时，用户还必须遵守操作手册和下列标准中的规定：
 - GB50257-1996：“电气装置安装工程爆炸和火灾危险环境电气装置施工及验收规范”。
 - GB3836.13-1997：“爆炸性气体环境用电气设备，第 13 部分：爆炸性气体环境用电气设备的检修”。
 - GB3836.15-2000：“爆炸性气体环境用电气设备，第 15 部分：危险场所电气安装 (煤矿除外)”。
 - GB3836.16-2006：“爆炸性气体环境用电气设备，第 16 部分：电气装置的检查和维护 (煤矿除外)”。
- 关于屏蔽接地，→ 2。

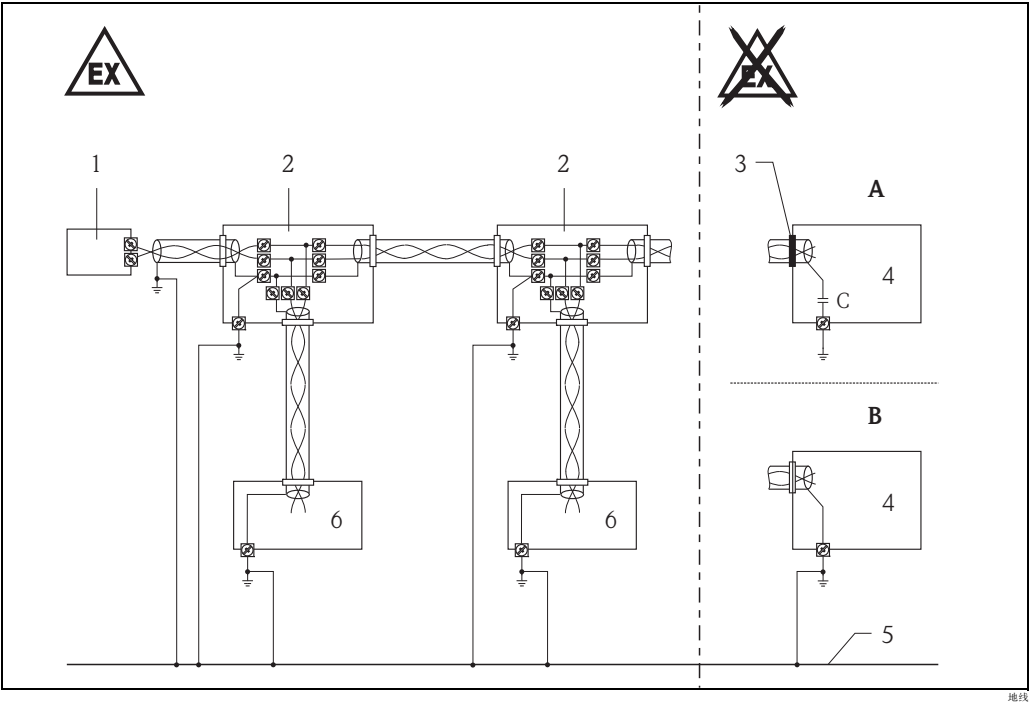


图 2

- A** 版本 1
使用小型电容器 (例如 1 nF, 1500 V, 绝缘强度, 陶瓷)。
连接到屏蔽的总电容不得超过 10 nF。
- B** 版本 2
- 1 终端电阻
2 配电盘 / 接线盒
3 屏蔽层绝缘
4 电源单元 / 分段耦合器
5 电势平衡 (保持在高等级)
6 现场设备

注意

- 当设备连接到经认证的 IIC 或 IIB 设备组的 Ex ib 类本安型电路时，防护类型作如下改变：
Ex ib IIC T6 或 Ex ib IIB T6。
- 从实体概念的角度来讲，I/O 电路和关联设备之间进行互连的条件如下：
 $U_o \leq U_i$, $I_o \leq I_i$, $P_o \leq P_i$, $C_o \geq C_i + C_c$, $L_o \geq L_i + L_c$ 。
注意：C_c 和 L_c 代表电缆的分布电容和分布电感。

可选件

- 远程显示器
例如 FHX40。遵守相关的安全指南。

安全指南：
区域 0

- 只有在下列大气条件下才能在有爆炸可能的蒸汽 / 空气混合物中操作设备：
 $-20\text{ }^{\circ}\text{C} \leq T \leq +60\text{ }^{\circ}\text{C}$
 $800\text{ hPa} \leq p \leq 1100\text{ hPa}$
- 如果不存在可能爆炸的混合物，则变送器可在符合制造商技术规范的其他大气条件下运行。
- 只有当介质的防潮材料具备足够的耐用性时，才可把设备安装于介质中。
- 在本安型和非本安型电路间最好采用电气隔离的相关设备。

温度表

过程温度
最高 80 °C

温度组别	环境温度
T6	-40 °C...+60 °C
T5	-40 °C...+75 °C
T4...T1	-40 °C...+80 °C

连接数据

带 PROFIBUS PA 或 FOUNDATION Fieldbus (基金会现场总线) 电子插件的 Prosonic M，Ex ia IIC：按照 FISCO 模型或 ENTITY 概念 (单个互联)

- 电源和信号电路的防护类型：本安型 Ex ia IIC 或 IIB

最大值		
$U_i = 17.5\text{ V}$ $I_i = 500\text{ mA}$ $P_i = 5.5\text{ W}$	或 $U_i = 24\text{ V}$ $I_i = 250\text{ mA}$ $P_i = 1.2\text{ W}$	$L_i = 10\text{ }\mu\text{H}$ $C_i = 5\text{ nF}$ 泄漏电流 $\leq 50\text{ }\mu\text{A}$

可选件：远程显示器

- 电源和信号电路的防护类型：本安型 Ex ia IIC 或 IIB。

电源		
$U_o = 4.2\text{ V}$ $I_o = 34\text{ mA}$ $P_o = 36\text{ mW}$	$L_o = 5\text{ mH}$ $C_o = 4\text{ }\mu\text{F}$	有效的内部电容 $L_i =$ 可忽略 有效的内部电容 $C_i =$ 可忽略 特征曲线：线性

www.endress.com/worldwide

Endress+Hauser 
People for Process Automation

XA00437F-B/00/B2/13.13
71216212
CCS/FM 9.0

