



Level



Pressure



Flow



Temperature

Liquid
Analysis

Registration

Systems
Components

Services



Solutions

Technical Information

Soliphant T FTM20, FTM21

Level limit switch

Robust vibration limit switch for bulk solids,
also for dust incendive hazard areas



Application

Soliphant T is a robust level limit switch for silos with fine-grained or coarse-grained, non-fluidised bulk solids. The various designs means the device has a wide range of applications. Certificates are also available for use in dust incendive hazard areas.

FTM20 compact design (250 mm) as vibrating rod for installation in any direction

FTM21 vibrating rod with extension pipe (500 mm/1000 mm/1500 mm/20 in/40 in/60 in) for installation in any direction

Typical applications: cereals, coffee beans, sugar, animal feed, rice, detergents, dye powder, chalk, gypsum, cement, sand, plastic granules

Your benefits

- No calibration: easy commissioning (plug and play)
- Insensitive to build-up: maintenance-free operation
- No mechanically moving parts: no wear, long operating life
- Sensor material 316L: hardly any abrasion even with building materials
- F16 plastic housing with cover with sight glass: switch status visible from outside
- F18 aluminium housing also available
- Insensitive to external vibration and flow noises
- Also available with explosion protection ATEX II 1/3 D, FM or CSA approval


Table of contents

Function and system design	3	Mechanical construction	9
Measuring principle	3	Design, dimensions	9
Measuring system	3	Weight	10
Cable specifications	4	Material	10
Cable entries	4	Human interface	10
Input	4	Display elements	10
Measured variable	4	Operating elements of electronic inserts	
Measuring range (application)	4	FEM22 and FEM24	11
Input signal	4	Sediment detection	11
Measuring frequency	4	Certificates and approvals	12
Output	4	CE mark, declaration of conformity	12
Galvanic isolation	4	Ex approval	12
Switch behaviour	4	Type of protection	12
Power-on behaviour	4	Other standards and guidelines	12
Fail-safe mode	4	Ordering information	13
Switching delay	4	Soliphant T FTM20	13
Ex specifications	4	Soliphant T FTM21	14
FEM22 electronic insert (DC PNP)	5	Accessories	15
Power supply	5	Sliding sleeve	15
Electrical connection	5	Spare parts	15
Output signal	5	Supplementary documentation	16
Signal on alarm	5	Operating Instructions	16
Connectable load	5	Certificates	16
FEM24 electronic insert (AC/DC with relay output) ..	6		
Power supply	6		
Electrical connection	6		
Output signal	6		
Signal on alarm	6		
Connectable load	6		
Operating conditions	7		
Installation instructions	7		
Environment	7		
Ambient temperature range	7		
Storage temperature	7		
Climate class	7		
Degree of protection	7		
Vibration resistance	7		
Electrical safety	7		
Electromagnetic compatibility	7		
Process	8		
Environment	8		
Thermal shock resistance	8		
Limiting medium pressure range	8		
State of aggregation	8		
Grain size	8		
Bulk density	8		
Lateral load	8		

Function and system design

Measuring principle

A piezoelectric drive excites the vibrating rod of Soliphant T FTM20, FTM21 to its resonance frequency. If medium covers the vibrating rod, the rod's vibrating amplitude changes (the vibration is damped). Soliphant's electronics compare the actual amplitude with a target value and indicates whether the vibrating rod is vibrating freely or whether it is covered by medium.

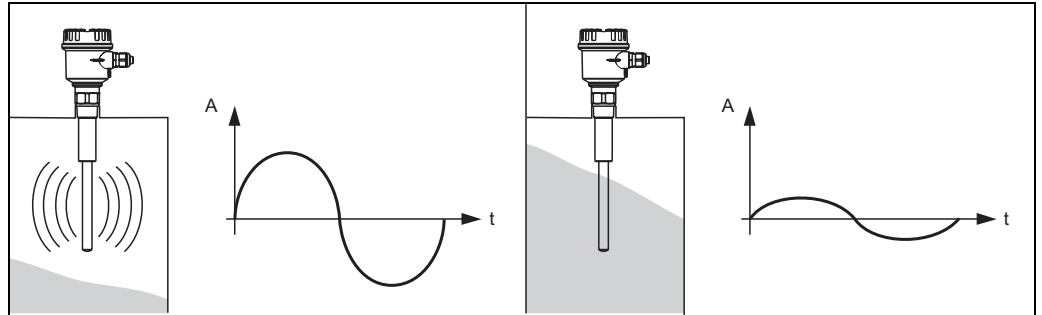


$A = \text{amplitude}$

Measuring system

Soliphant T is a compact electronic switch.

Thus, the entire measuring system only consists of:

- Soliphant T FTM20 or FTM21 with FEM22 or FEM24 electronic insert
- a supply point and
- the connected control systems, switching units, signalling systems (e.g. lamps, horns, PCS, PLC, etc.)

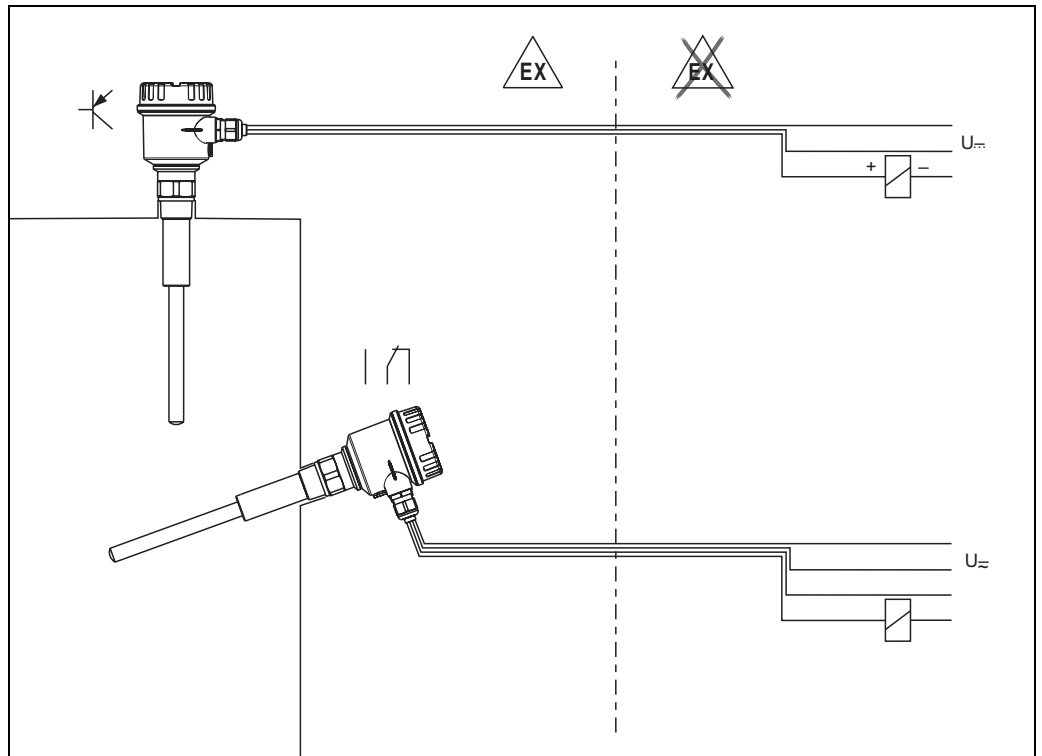

L00-FTM2xxxx-14-06-xx-xx-001

Cable specifications

Use a shielded cable in the event of strong electromagnetic radiation.

Immunity to temperature change of connecting cable

The connecting cables must withstand the ambient temperature +15 K.

Cable entries	M20x1.5 (cable gland); NPT ½; G ½
----------------------	-----------------------------------

Input

Measured variable	Level (according to the mounting location and the overall length)
--------------------------	---

Measuring range (application)	The measuring range depends on the mounting location of Soliphant T and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 in, 40 in, 60 in.
--------------------------------------	---

Input signal	Probes covered => small amplitude Probe not covered => large amplitude
---------------------	---

Measuring frequency	700...800 Hz
----------------------------	--------------

Output

Galvanic isolation	FEM22: Between sensor and power supply FEM24: Between sensor, power supply and load
---------------------------	--

Switch behaviour	Binary
-------------------------	--------

Power-on behaviour	When switching on the power supply the output is set to "signal on alarm". After a maximum of 3 s it switches to the correct output signal.
---------------------------	--

Fail-safe mode	Minimum/maximum quiescent current safety can be switched at electronic insert Max. = maximum safety: When the vibrating rod is covered, the output switches in the direction of the signal on alarm Used for overflow protection for example Min. = minimum safety: When the vibrating rod becomes exposed, the output switches in the direction of the signal on alarm Used for empty running protection for example
-----------------------	---

Switching delay	0.5 s when the sensor is covered 1 s when the sensor is exposed
------------------------	--

Ex specifications	FEM22, FEM24: – Explosion protection for explosive dust-air mixtures: Dust-Ex, DIP
--------------------------	--

FEM22 electronic insert (DC PNP)


Power supply

DC voltage 10 V...45 V
 Ripple max. 5 V, 0...400 Hz
 Current consumption max. 18 mA
 Power consumption max. 0.81 W
 Reverse polarity protection
 Separation voltage: 2.2 kV
 FEM22 overvoltage protection: overvoltage category III

Electrical connection

Three-wire direct current connection

Preferred in conjunction with programmable logic controllers (PLC), DI modules as per EN 61131-2.
 Positive signal at electronics switch output (PNP);
 Output blocked at level limit.

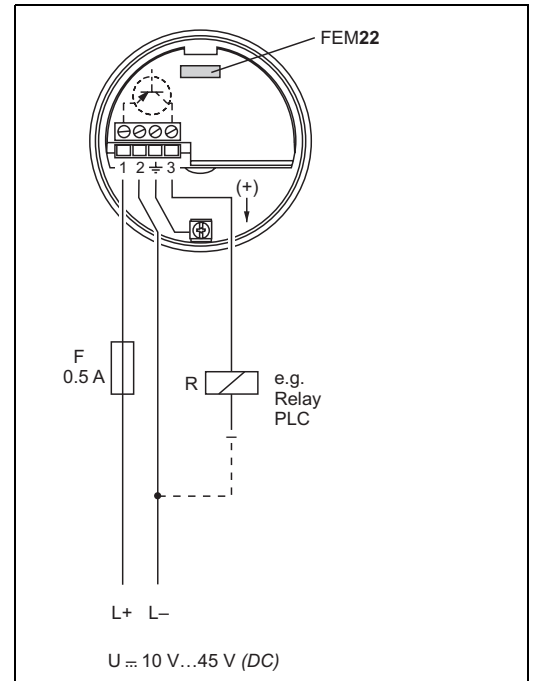

L00-FTM2xxxx-04-05-xx-en-002

Output signal

IL = Load current (switched through)
 < 100 μ A = Residual current (blocked)

☀ = Lit
 ● = Not lit

L00-FTL2xxxx-07-05-xx-xx-000

Fail-safe mode	Level	Output signal	LEDs	
			green	yellow
Max.		$L+ \xrightarrow{I_L} +$ 1 → 3	☀	☀
		$1 \xrightarrow{< 100 \mu A} 3$	☀	●
Min.		$L+ \xrightarrow{I_L} +$ 1 → 3	☀	☀
		$1 \xrightarrow{< 100 \mu A} 3$	☀	●

L00-FTM2xxxx-04-05-xx-xx-003

Signal on alarm

Output signal on power failure or in the event of device failure: < 100 μ A

Connectable load

- Load switched via transistor and separate PNP connection
- Load current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA
- Residual current: < 100 μ A (for blocked transistor)
- Capacitive load: max. 0.5 μ F for 45 V, max. 1.0 μ F for 24 V
- Residual voltage: < 3 V (for transistor switched through)

FEM24 electronic insert (AC/DC with relay output)

Power supply

Alternating voltage 19 V...253 V, 50/60 Hz or DC voltage 19 V...55 V
 Power consumption max. 1.3 W
 Reverse polarity protection
 Separation voltage: 2.2 kV
 FEM24 overvoltage protection: overvoltage category III

Electrical connection

Universal current connection with relay output

Power supply:
 Please note the different voltage ranges
 for AC and DC.

Output:
 When connecting a device with
 high inductance, provide a spark arrester
 to protect the relay contact.
 A fine-wire fuse (depending on the
 load connected) protects the relay
 contact in the event of a short-circuit.


Both relay contacts switch simultaneously.
 DPDT (double pole double throw)

* When jumpered, the
 relay output works with NPN logic.

** See below "Connectable load"



Note!
 Please note the different voltage ranges
 for direct and alternating current.

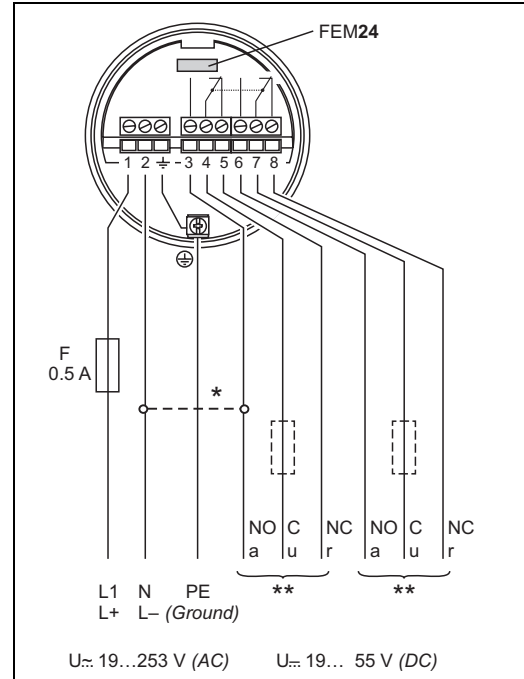

L00-FTM2xxxx-04-05-xx-xx-004

Output signal

= Relay energised
 = Relay de-energised
 = Lit
 = Not lit

L00-FTL2xxxx-07-05-
 xx-xx-001

	Fail-safe mode	Level	Output signal	LEDs	
				green	yellow
Max.					
Min.					

L00-FTM2xxxx-04-05-xx-xx-005

Signal on alarm

Output signal in event of power failure: relay de-energised

Connectable load

- Loads switched via 2 floating change-over contacts.
- I~ max. 6 A, U~ max. 253 V; P~ max. 1500 VA, $\cos \varphi = 1$, P~ max. 750 VA, $\cos \varphi > 0.7$;
- I- max. 6 A to 30 V, I- max. 0.2 A to 125 V.
- The following applies when connecting a functional extra-low voltage circuit with double insulation as per IEC 1010: Sum of voltages of relay output and power supply max. 300 V


Operating conditions

Installation instructions

Mounting location

e.g. storage or buffer container

Orientation

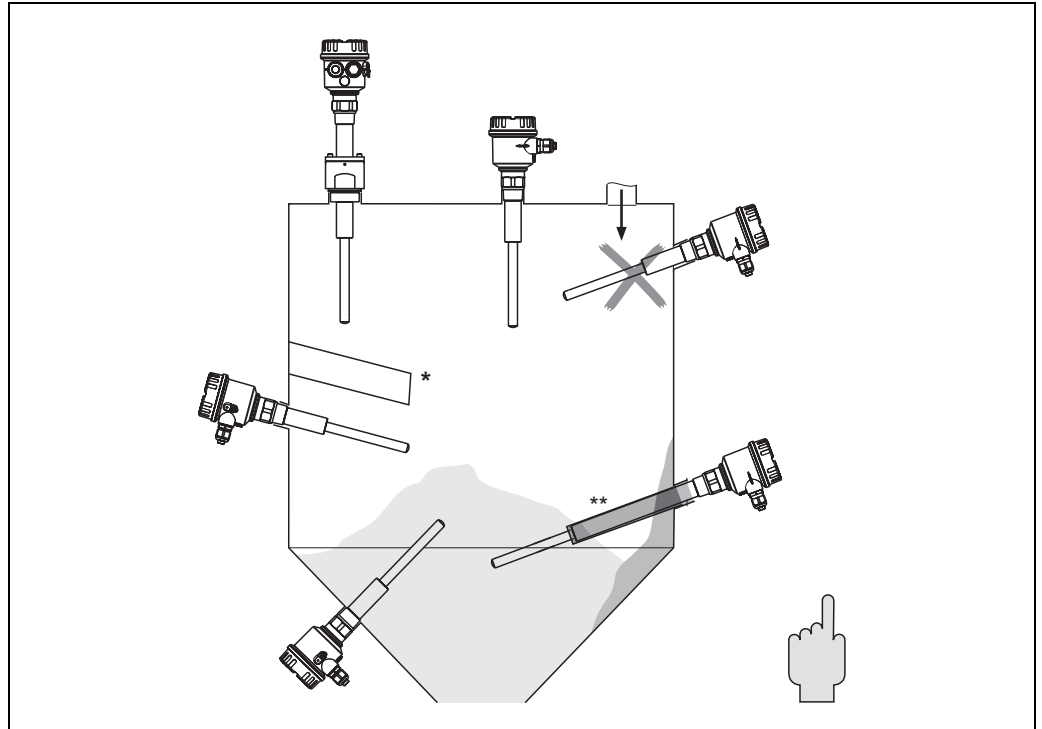

L00-FTM20xxx-11-05-xx-xx-000

Horizontal installation/vertical installation

** With protective cover (to be provided by customer)*

*** With protecting tube (to be provided by customer)*


Environment

Ambient temperature range	-40...70 °C
Storage temperature	-40...85 °C
Climate class	Climatic protection as per DIN IEC 68 Part 2-38, Fig. 2a
Degree of protection	IP66/IP67, NEMA4X
Vibration resistance	DIN 60068-2-27 / IEC 68-2-27: shock 30 g; vibration 0.01 g ² /Hz
Electrical safety	IEC 61010, CSA 1010.1-92, FM3600
Electromagnetic compatibility	Interference emission to EN 61326, Electrical Equipment Class B Interference immunity to EN 61326, Annex A (Industrial)

Process

Environment

Permitted ambient temperature T_a at housing depending on the medium temperature T_p in the container:

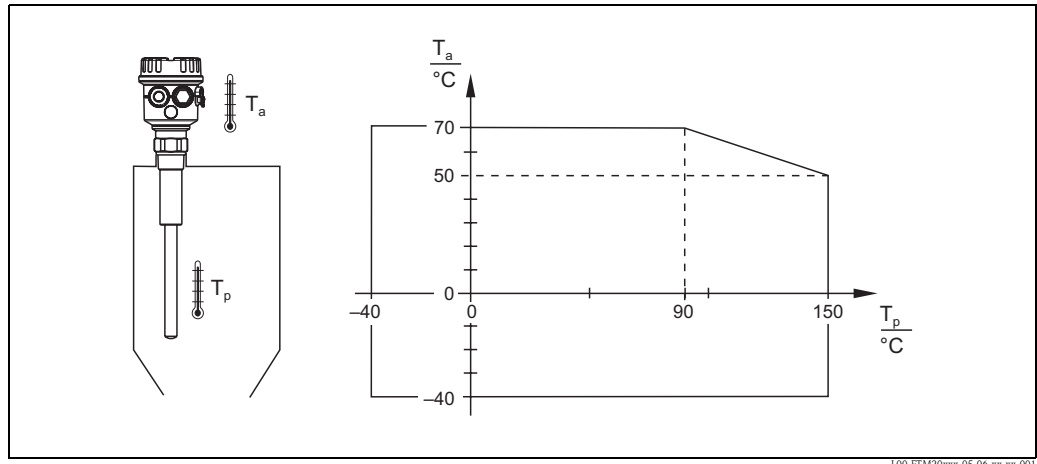

$$x \text{ } ^\circ\text{C} = (1.8 x + 32) \text{ } ^\circ\text{F}$$

Thermal shock resistance

Maximum 120 K

Limiting medium pressure range

-1...25 bar

Maximum Working Pressure (MWP)

25 bar

Burst pressure

100 bar

State of aggregation

Solids


Grain size

$\leq 25 \text{ mm}$

Bulk density

$\geq 200 \text{ g/l}$, not fluidised

Lateral load

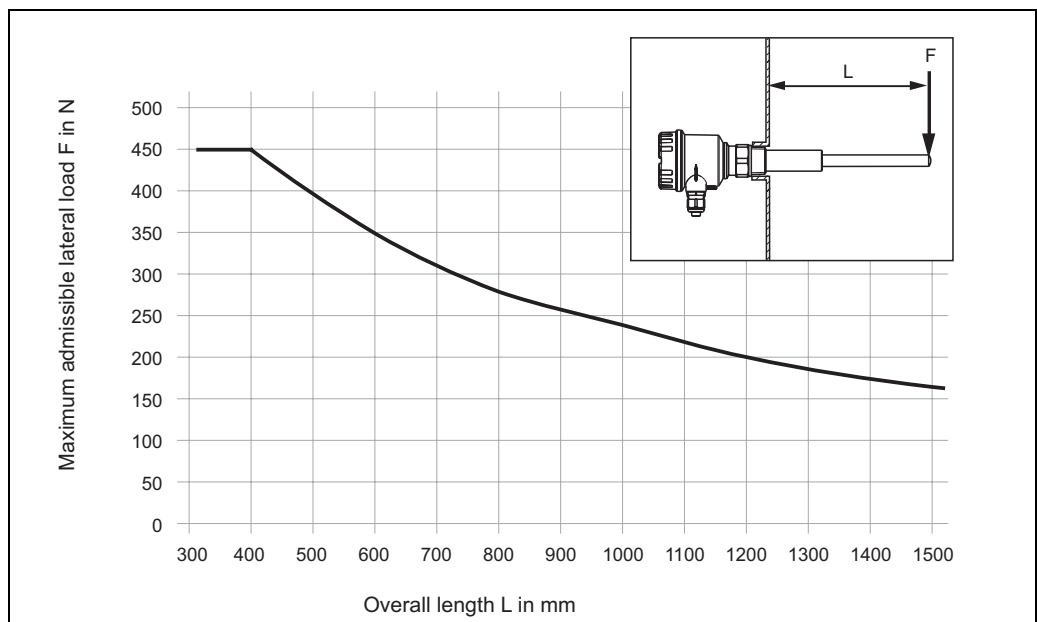

$$100 \text{ mm} = 3.94 \text{ in}$$


Mechanical construction



Note!
All dimensions in mm! (100 mm = 3.94 in)


Design, dimensions

Compact version

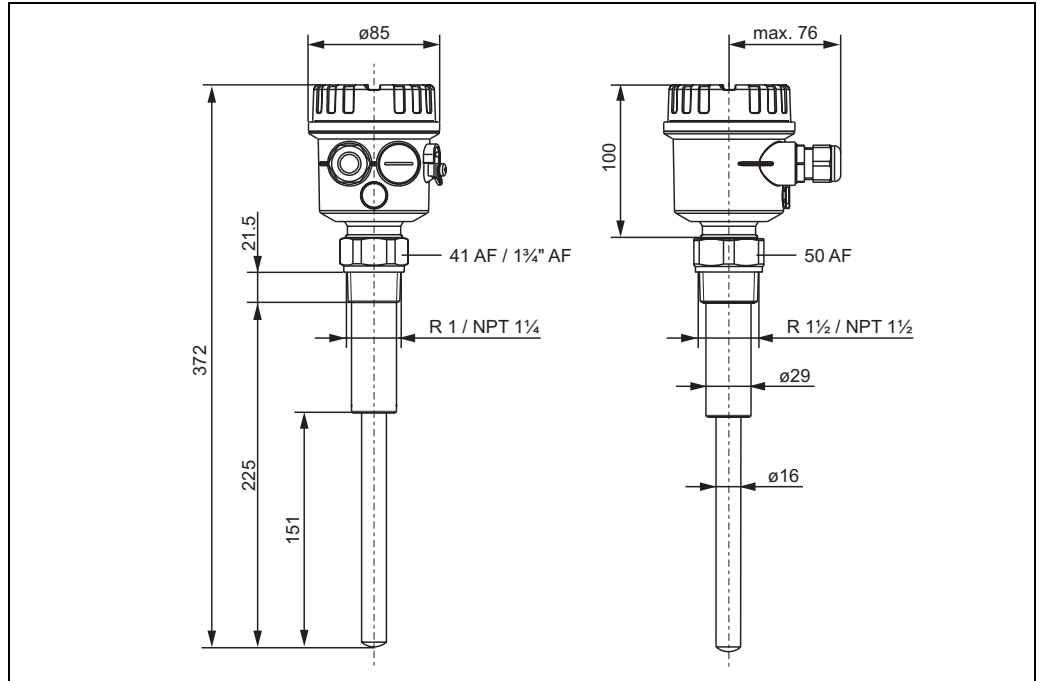

L00-FTM20xxx-06-05-xx-en-001

Pipe extension

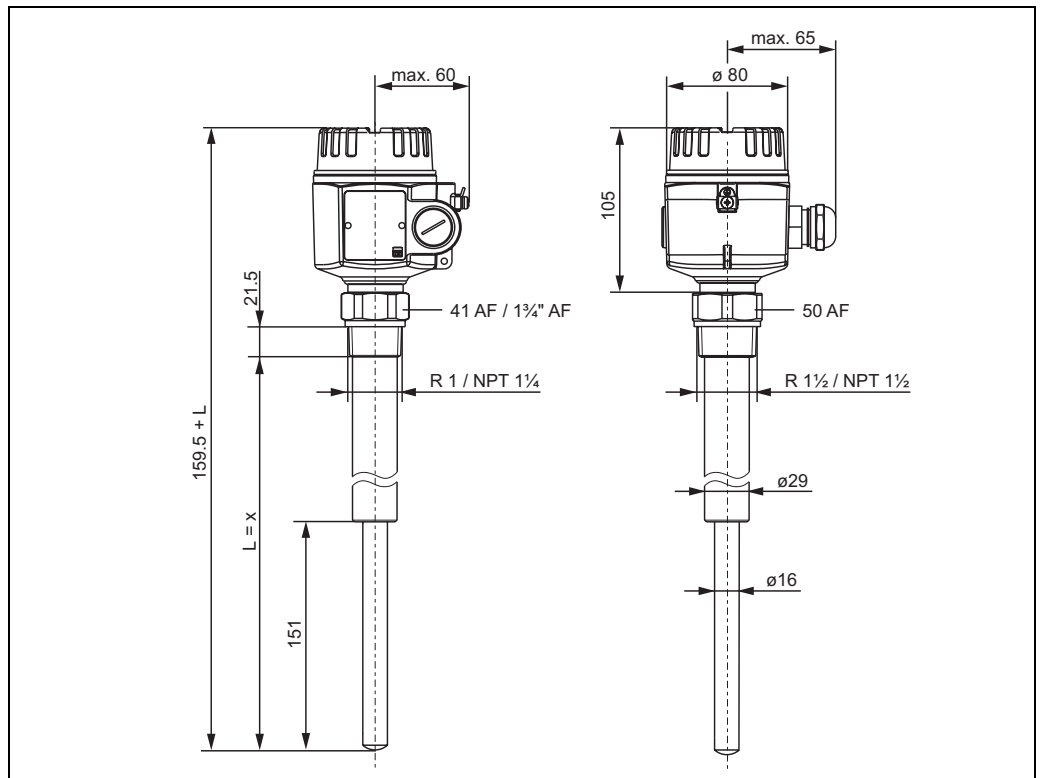

L00-FTM20xxx-06-05-xx-en-000

$x = 500 \text{ mm}; 1000 \text{ mm}; 1500 \text{ mm}; 20 \text{ in}; 40 \text{ in}; 60 \text{ in}$

Weight	FTM20/FTM21 with F16 housing, FEM24 and R 1 thread:	
	Compact	= approx. 1.0 kg
	500 mm	= approx. 1.3 kg
	1000 mm	= approx. 2.0 kg
	1500 mm	= approx. 2.6 kg

Material	F16 housing:
	PTB-FR, cover with sight glass made of PA12, EPDM cover seal
	F18 housing:
	Aluminium EN-AC-ALSi10Mg, plastic-coated EPDM cover seal
	Process connections:
	<ul style="list-style-type: none"> ■ R1; R1½ (316L, DIN 2999) ■ NPT 1¼ - 11½; NPT 1½ - 11½ (316L, ANSI B 1.20.1)
	Sensor:
	316L

Human interface

Display elements




Note!
The switch settings in the following graphics are in the as-delivered state.

FEM22

One green LED: operation

One yellow LED: electronic switch closed

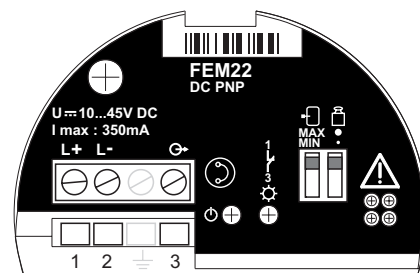


L00-FEM22xxx-07-05-xx-xx-001

FEM24


One green LED: operation

One yellow LED: contact closed
(relay energised or fed with current)

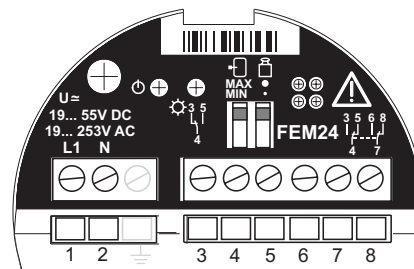


L00-FEM24xxx-07-05-xx-xx-002

**Operating elements of
electronic inserts
FEM22 and FEM24**

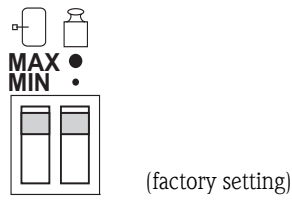

 One switch for safety mode


MAX Overfill protection
MIN Dry running protection

 One switch for bulk density/density setting

- 400 g/l (high bulk density)
- 200 g/l (low bulk density)

Sediment detection

Detection of solids under water

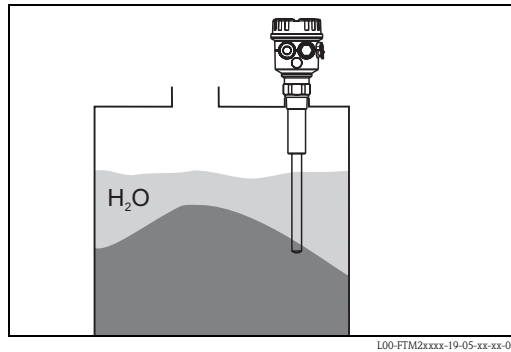

The system does not detect coverage by liquids similar to water.

Certificates and approvals

**CE mark,
declaration of conformity**

The instrument is designed to meet state-of-the-art safety requirements, has been tested and left the factory in a condition in which it is safe to operate.

The instrument complies with the applicable standards and regulations as listed in the EC declaration of conformity and thus complies with the statutory requirements of the EG directives.

Endress+Hauser confirms the successful testing of the instrument by affixing to it the CE mark.

Ex approval

Your Endress+Hauser sales centre can provide you with information on the Ex versions which can currently be delivered.

All explosion protection data are given in a separate documentation (see "Supplementary Documentation") which is available upon request.

Copies of certificates available upon request.

Type of protection

See "Ordering information" as of Page 13 and "Supplementary documentation" on Page 16.

**Other standards and
guidelines**

Other standards and guidelines that were taken into consideration in designing and developing Soliphant T FTM20, FTM21:

- Low Voltage Directive (73/23/EEC)
- DIN EN 61010 Part 1, 2001
Protection Measures for Electrical Equipment for Measurement, Control, Regulation and Laboratory Procedures
Part 1: General requirements
- EN 61326
Electrical Equipment for Measurement, Control and Laboratory Use
EMC requirements

Ordering information

Soliphant T FTM20

10		Approval			
	A	Non-hazardous area			
	C	CSA General Purpose, CSA C US			
	D	CSA DIP+FM DIP			
	Y	Special version			
	4	ATEX II 1/3 D			
20		Process connection			
	A	Thread, DIN2999	R1,	316L	
	G	Thread, DIN2999	R1½,	316L	
	M	Thread, ANSI	NPT1¼,	316L	
	N	Thread, ANSI	NPT1½,	316L	
	Y	Special version			
30		Electronics; output			
	2	FEM22:	3-wire PNP,	10... 45 V DC	
	4	FEM24:	Relay DPDT,	19...253 V AC / 55 V DC	
	8	FEM20B	ASI Bus		
	9	Special version			
40		Housing; cable entry			
	2	F16	Polyester	IP66/IP67, NEMA4X	M20 gland
	3	F16	Polyester	IP66/IP67, NEMA4X	Thread, NPT½
	4	F16	Polyester	IP66/IP67, NEMA4X	Thread, G½
	5	F18	Aluminium	IP66/IP67, NEMA4X	M20 gland
	6	F18	Aluminium	IP66/IP67, NEMA4X	Thread, NPT¾
	7	F18	Aluminium	IP66/IP67, NEMA4X	Thread, G½
	9	Special version			
50		Additional fittings			
	A	Basic version			
	Y	Special version			
FTM20		Complete product designation			

Soliphant T FTM21

10	Approval					
	A	Non-hazardous area				
	C	CSA General Purpose, CSA C US				
	D	CSA DIP+FM DIP				
	Y	Special version				
	4	ATEX II 1/3 D				
20	Process connection					
	A	Thread, DIN2999	R1,	316L		
	G	Thread, DIN2999	R1½,	316L		
	M	Thread, ANSI	NPT1¼,	316L		
	N	Thread, ANSI	NPT1½,	316L		
	Y	Special version				
25	Sensor length					
	2	500 mm				
	3	1000 mm				
	4	1500 mm				
	6	20 inch				
	7	40 inch				
	8	60 inch				
	9	Special version				
30	Electronics; output					
	2	FEM22:	3-wire PNP,	10...45 V DC		
	4	FEM24:	Relay DPDT,	19...253 V AC / 55 V DC		
	8	FEM20B	ASI Bus			
	9	Special version				
40	Housing; cable entry					
	2	F16	Polyester	IP66/IP67,	NEMA4X	M20 gland
	3	F16	Polyester	IP66/IP67,	NEMA4X	Thread, NPT½
	4	F16	Polyester	IP66/IP67,	NEMA4X	Thread, G½
	5	F18	Aluminium	IP66/IP67,	NEMA4X	M20 gland
	6	F18	Aluminium	IP66/IP67,	NEMA4X	Thread, NPT¾
	7	F18	Aluminium	IP66/IP67,	NEMA4X	Thread, G½
	9	Special version				
50	Additional fittings					
	A	Basic version				
	Y	Special version				
FTM21						Complete product designation

Accessories


Sliding sleeve

For pressurised container

- R 1½
DIN 2999
52023312
- NPT 1½ - 11½
ANSI B 1.20.1
52025090



Note!
Suitable for multiple switch-point configurations!

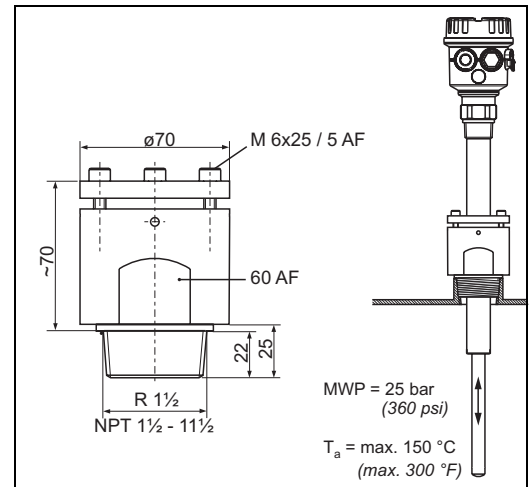


L00-FTM2xxxx-03-05-xx-en-001

For unpressurised container, IP65

- R 1½
DIN 2999
52023313
- NPT 1½ - 11½
ANSI B 1.20.1
52024578



Note!
Only suitable for one-time switch-point configuration!

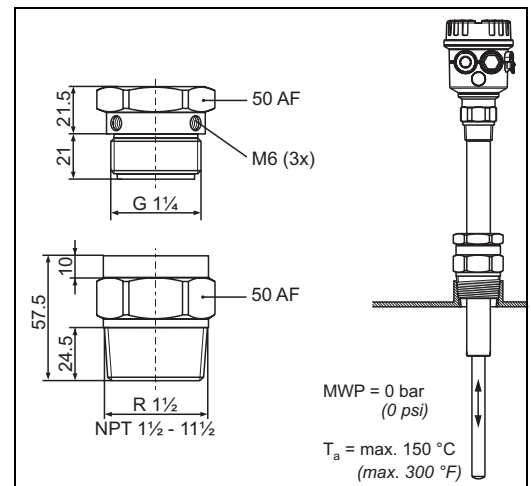

L00-FTM2xxxx-03-05-xx-en-002

Spare parts

- FEM22 electronic insert
52025688
- FEM24 electronic insert
52025691
- Cover for polyester housing (F16), transparent plastic with seal
52025790
- Cover for aluminium housing (F18), aluminium with seal
52005910
- Cover for aluminium housing (F18), aluminium with glass insert and seal (not for EEx d)
52027693

Supplementary documentation

Operating Instructions

- Soliphant T FTM20, FTM21
KA227F/00/a6

Certificates

- ATEX II 1/3 D T +12 K
XA300F/00/a3

Instruments International

Endress+Hauser
Instruments International AG
Kaegenstrasse 2
4153 Reinach
Switzerland

Tel. +41 61 715 81 00
Fax +41 61 715 25 00
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation

